


F150 Series Class 150 CF8M TFM Seat

FIRE SAFE API 607-7 Size 6"-8"

DS-F150-SS-F-G-G-V-L

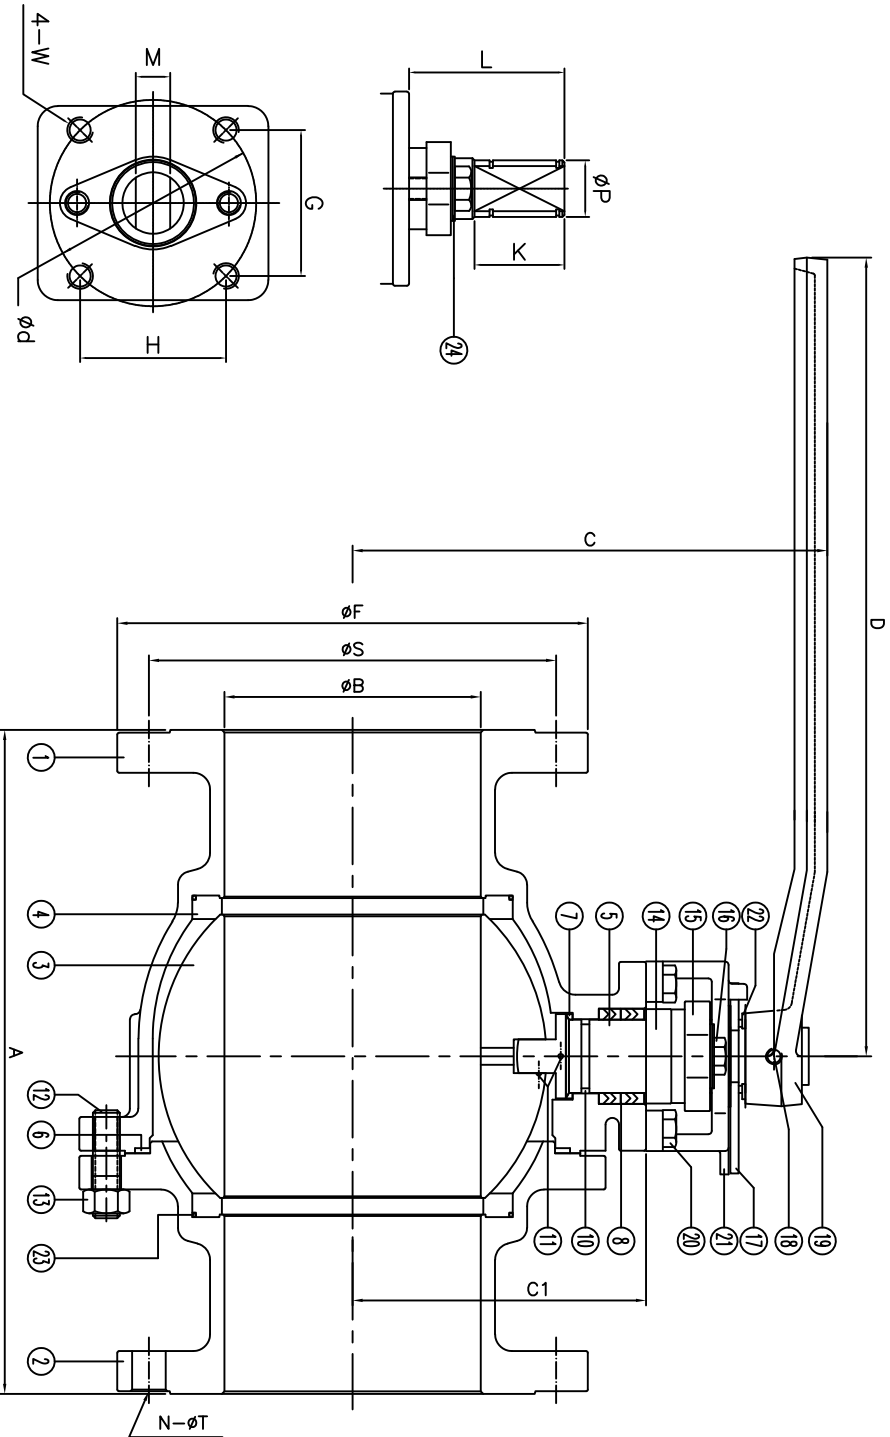

Size	A	B	C	C1	D	F	N	S	T	d	G	H	K	L	M	P	W	ISO
6"	15.5	5.98	11.2	6.93	25.4	11.0	8	9.50	0.88	4.92	3.48	3.48	2.56	3.58	1.024	1.338	1/2-13UNC	F12
8"	18.0	7.87	11.6	8.78	25.4	13.5	8	11.75	0.88	4.92	3.48	3.48	2.56	3.58	1.024	1.338	1/2-13UNC	F12

For certified drawing, consult factory

Drawn by:	Date:	Scale: NTS	Rev: 0	Drawing Title: Flange Bolt Valve Class 150 6" - 8"
Checked by:	Date:	Unit: inch	Sheet: xxx	Drawing No.: DS-F150SSFGV-L-03-YM
Approved by:	Date:	Material: See Notes		

ANSI RATING CLASS 150

SEAT TEST @ 80-100 PSI	ASME B16.34
SHELL TEST @ 425 PSI	ASME B16.34
PRESSURE TEMPERATURE RATING	ASME B16.34
FACE TO FACE DIMENSION	ASME B16.10
END CONNECTION	ASME B16.5
JOINT STRENGTH	ASME B16.34
WALL THICKNESS	ASME B16.34
BASIC DESIGN	ASME B16.34

No.	Name	Material
1	Body	Stainless Steel
2	Cap	ASTM A351 CF8M
3	Ball	ASTM A351 CF8M
4	Seat	TFM
5	Stem	17-4PH
6	Gasket	SWG SSS04/Graphite
7	Thrust Washer	25%Carbon+TFM
8	Stem Packing	Graphite
9		
10	O-Ring	Viton
11	Anti-Static	SS304
12	Body Stud	ASTM A193 B8M
13	Body Nut	ASTM A194 8M
14	Packing Follower	SS304
15	Packing Gland	ASTM A351 CF8
16	Gland Bolt	SS304
17	Travel Stopper	SS304
18	Set Screw	Steel
19	Handle	Ductile Iron
20	Housing Bolt	SS304
21	Stop Housing	ASTM A351 CF8
22	Snap Ring	Plated Steel
23	Seat O-Ring	Viton
24	Belleville Washer	SS420

REVIEW ALL STANDARD SOFT PARTS FOR APPLICATION COMPATIBILITY



4815 W. 5th Street
Lumberton, NC 28358
Website: www.flotte.com
Tel: 910-738-8904
Fax: 910-738-9112
Email: holbie@flotte.com