

<i>Fusion Series</i>	<i>2000 WOG</i>	<i>CS</i>	<i>Super-Tek III Seat</i>
----------------------	-----------------	-----------	---------------------------

S23-CS-F-G-G-O-040



FIRESAFE PER API 607-5

SIZE 1-1/2"



QR CODE


Actuator ISO Mounting Flange (F07)

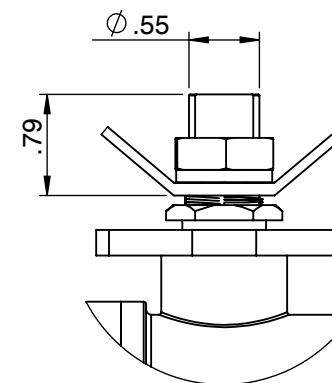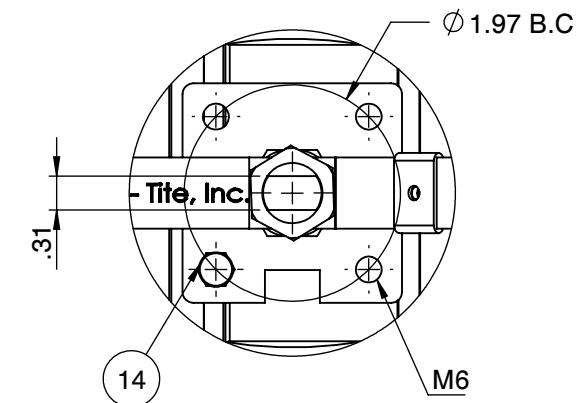

CS: Flo-Tite
S23CS

1-1/2"
WCB
2000
WOG

1-1/4" - 2" Body marking

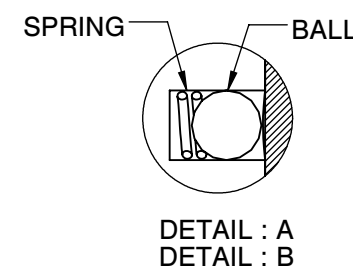

No.	Parts	Material
1	Body	ASTM A216 WCB
2	End Cap	ASTM A216 WCB
3	Seat	Super-Tek III
4	Ball	ASTM A351 CF8
5	Gasket	Graphite
6	Thrust Washer	25% Carbon PTFE
7	Stem Packing	Graphite
8	Stem	A276-304 / 17-4PH
9	Gland	SS304
10	Handle Washer	SS304
11	Handle Nut	SS304
12	Handle	Zinc Plated Steel
13	Handle Cover	PVC
14	Stop Screw	Steel
15	Locking Device	Zinc Plated CS
16	Anti-Static Device	SS304

PRESSURE RATING 2000 WOG

SEAT TEST @ 80~100 PSI	ASME B16.34
SHELL TEST @ 2175 PSI	ASME B16.34
PRESSURE TEMPERATURE RATING	ASME B16.34
END CONNECTION	ASME B16.11
JOINT STRENGTH	ASME B16.34
WALL THICKNESS	ASME B16.34
BASIC DESIGN	ASME B16.34

FOR CERTIFIED
DRAWING CONSULT
FACTORY

Drawn by :	M	Date : June 21, 2019	Scale : Not To Scale
Checked by :	M	Date : June 21, 2019	Unit : Inch
Approved by :	M	Date : June 21, 2019	Material : See Notes

Drawing Title:	NPT 1-1/2" FULL BORE BALL VALVE
Drawing No.:	DT-S23CSFGGO040

FLO-TITE™

4815 W. 5th Street Tel : 910-738-8904
Lumberton, NC 28358 Fax : 910-738-9112
Website: www.flotite.com E-mail : flotite@flotite.com

REVIEW ALL STANDARD SOFT PARTS FOR APPLICATION COMPATIBILITY