

<i>Fusion Series</i>	<i>2000 WOG</i>	<i>SS</i>	<i>Super-Tek III Seat</i>
----------------------	-----------------	-----------	---------------------------


S23-SS-F-G-G-L-008-XS1

FIRESAFE PER API 607-5



SIZE 1/4"



QR CODE



DETAIL C

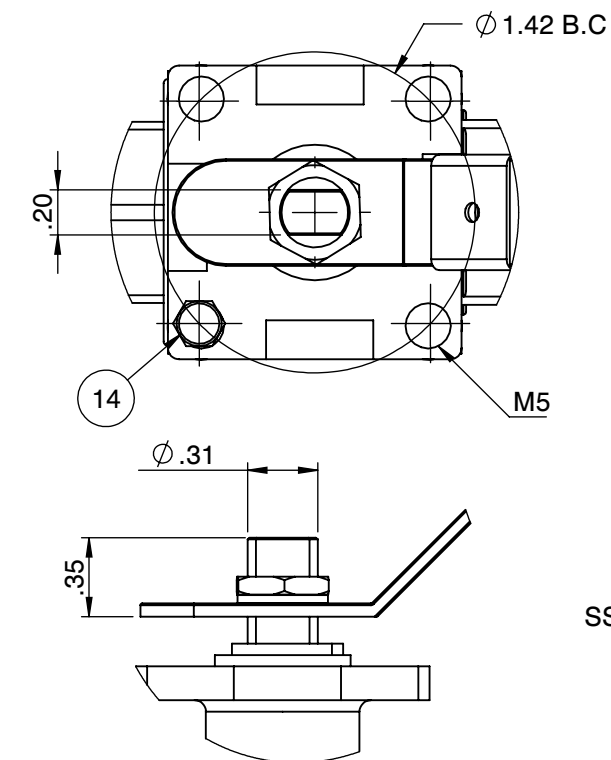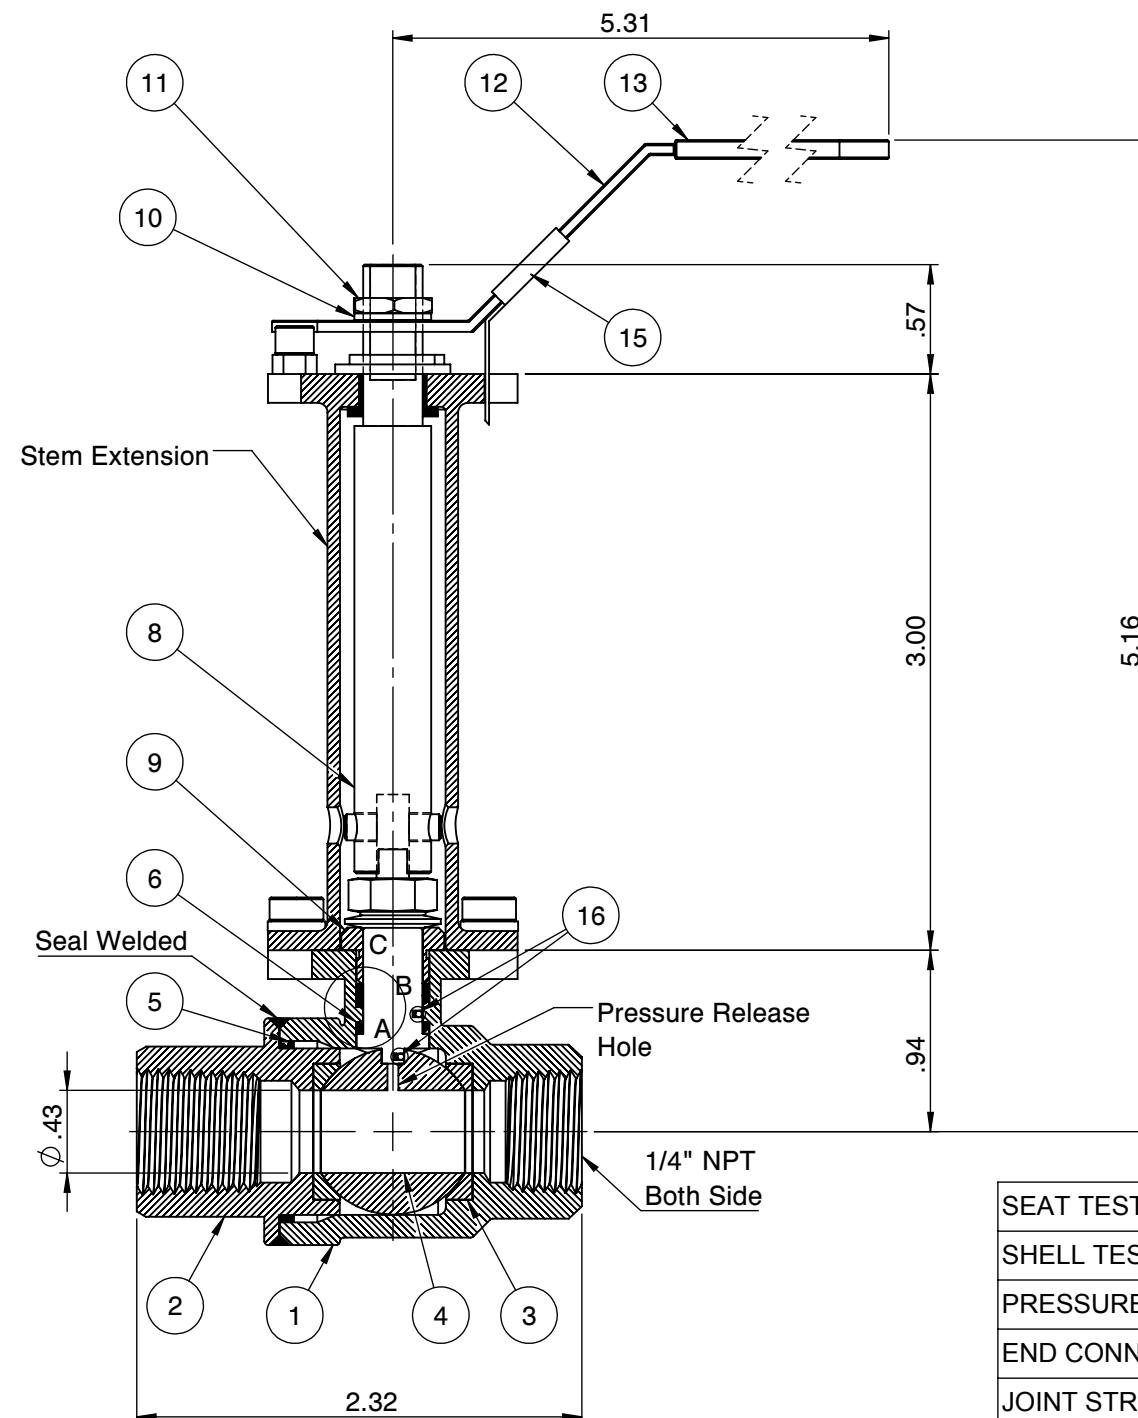


SS:

Flo-Tite
S23SS
CF8M

1/4"
2000
WOG

1/4" - 1" Body marking

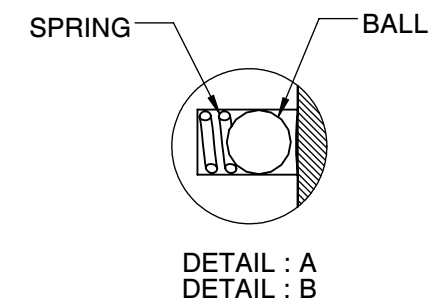

DETAIL : A
DETAIL : B

No.	Parts	Material
1	Body	ASTM A351 CF8M
2	End Cap	ASTM A351 CF8M
3	Seat	Super-Tek III
4	Ball	ASTM A351 CF8M
5	Gasket	Graphite
6	Thrust Washer	25% Carbon PTFE
7	Stem Packing	Graphite
8	Stem	A276-316 / 17-4PH
9	Gland	SS304
10	Handle Washer	SS304
11	Handle Nut	SS304
12	Handle	SS304
13	Handle Cover	PVC
14	Stop Screw	SS304
15	Locking Device	SS304
16	Anti-Static Device	SS316

PRESSURE RATING 2000 WOG

SEAT TEST @ 80~100 PSI	ASME B16.34
SHELL TEST @ 2175 PSI	ASME B16.34
PRESSURE TEMPERATURE RATING	ASME B16.34
END CONNECTION	ASME B16.11
JOINT STRENGTH	ASME B16.34
WALL THICKNESS	ASME B16.34
BASIC DESIGN	ASME B16.34

FOR CERTIFIED
DRAWING CONSULT
FACTORY

Drawn by :	M	Date : June 24, 2019	Scale : Not To Scale
Checked by :	M	Date : June 24, 2019	Unit : Inch
Approved by :	M	Date : June 24, 2019	Material : See Notes

Rev : 0	Drawing Title:	NPT 1/4" FULL PORT BALL VALVE
Sheet : xxx	Drawing No.:	DT-S23SSFGGL008XS1

FLO-TITE™

4815 W. 5th Street Tel : 910-738-8904
Lumberton, NC 28358 Fax : 910-738-9112
Website: www.flotite.com E-mail : flotite@flotite.com

REVIEW ALL STANDARD SOFT PARTS FOR APPLICATION COMPATIBILITY