






Actuator ISO Mounting Flange (F04)

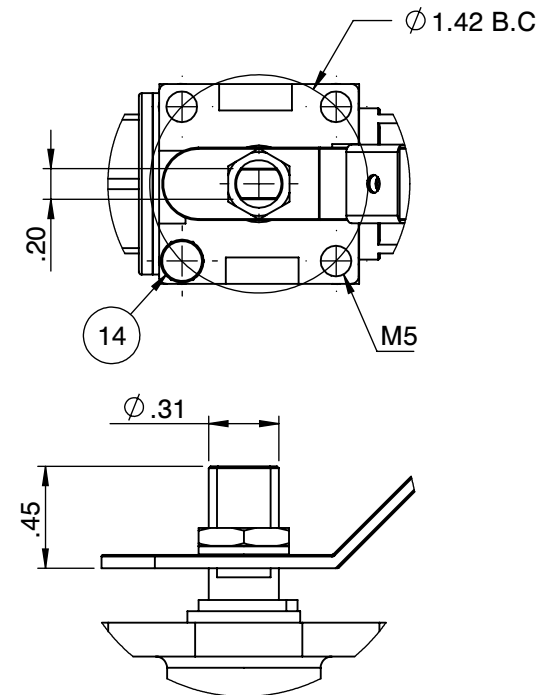

SS: Flo-Tite  
S23SS  
CF8M

1/2"  
2000  
WOG

1/4" - 1" Body marking

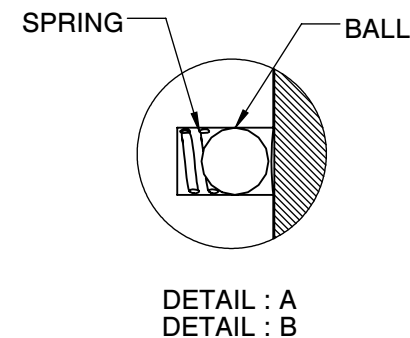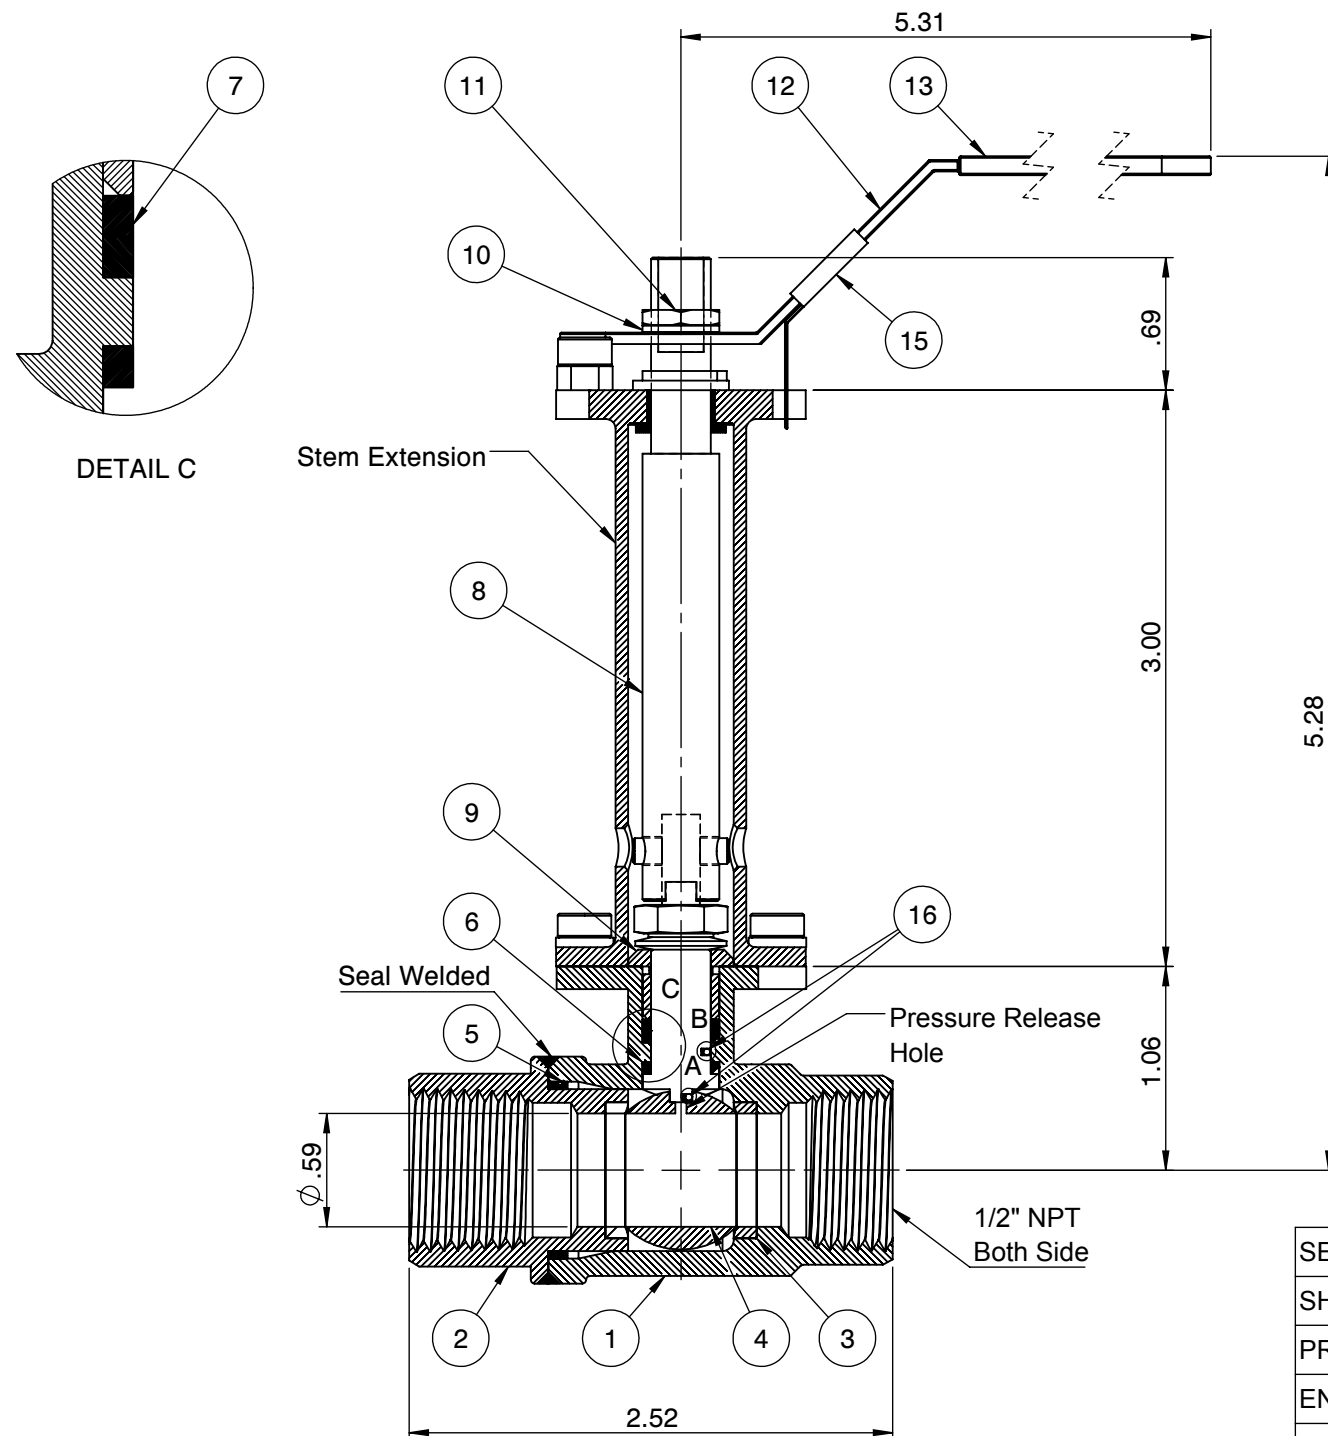

PRESSURE RATING 2000 WOG

|                             |             |
|-----------------------------|-------------|
| SEAT TEST @ 80~100 PSI      | ASME B16.34 |
| SHELL TEST @ 2175 PSI       | ASME B16.34 |
| PRESSURE TEMPERATURE RATING | ASME B16.34 |
| END CONNECTION              | ASME B16.11 |
| JOINT STRENGTH              | ASME B16.34 |
| WALL THICKNESS              | ASME B16.34 |
| BASIC DESIGN                | ASME B16.34 |

| No. | Parts              | Material          |
|-----|--------------------|-------------------|
| 1   | Body               | ASTM A351 CF8M    |
| 2   | End Cap            | ASTM A351 CF8M    |
| 3   | Seat               | Super-Tek III     |
| 4   | Ball               | ASTM A351 CF8M    |
| 5   | Gasket             | Graphite          |
| 6   | Thrust Washer      | 25% Carbon PTFE   |
| 7   | Stem Packing       | Graphite          |
| 8   | Stem               | A276-316 / 17-4PH |
| 9   | Gland              | SS304             |
| 10  | Handle Washer      | SS304             |
| 11  | Handle Nut         | SS304             |
| 12  | Handle             | SS304             |
| 13  | Handle Cover       | PVC               |
| 14  | Stop Screw         | SS304             |
| 15  | Locking Device     | SS304             |
| 16  | Anti-Static Device | SS316             |