


Fusion Series	1500 WOG	CS	Super-Tek Seat	T23-CS-F-G-G-L-065
FIRESAFE PER API 607-5			SIZE 2-1/2"	





Actuator ISO Mounting Flange (F10)

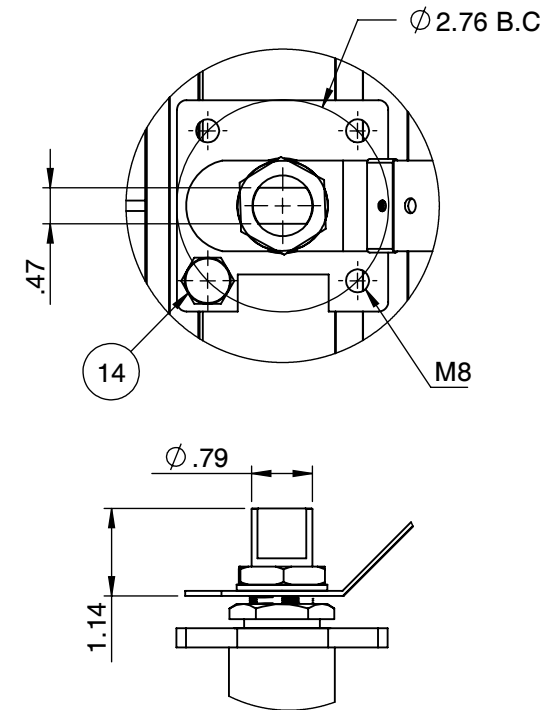

CS: Flo-Tite T23CS 2-1/2" WCB 1500 WOG

2-1/2" - 4" Body marking

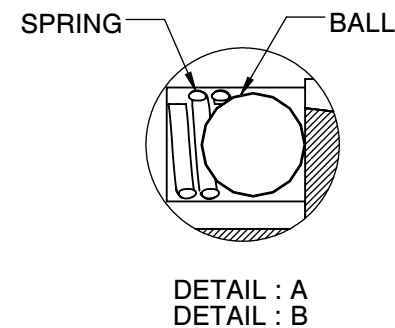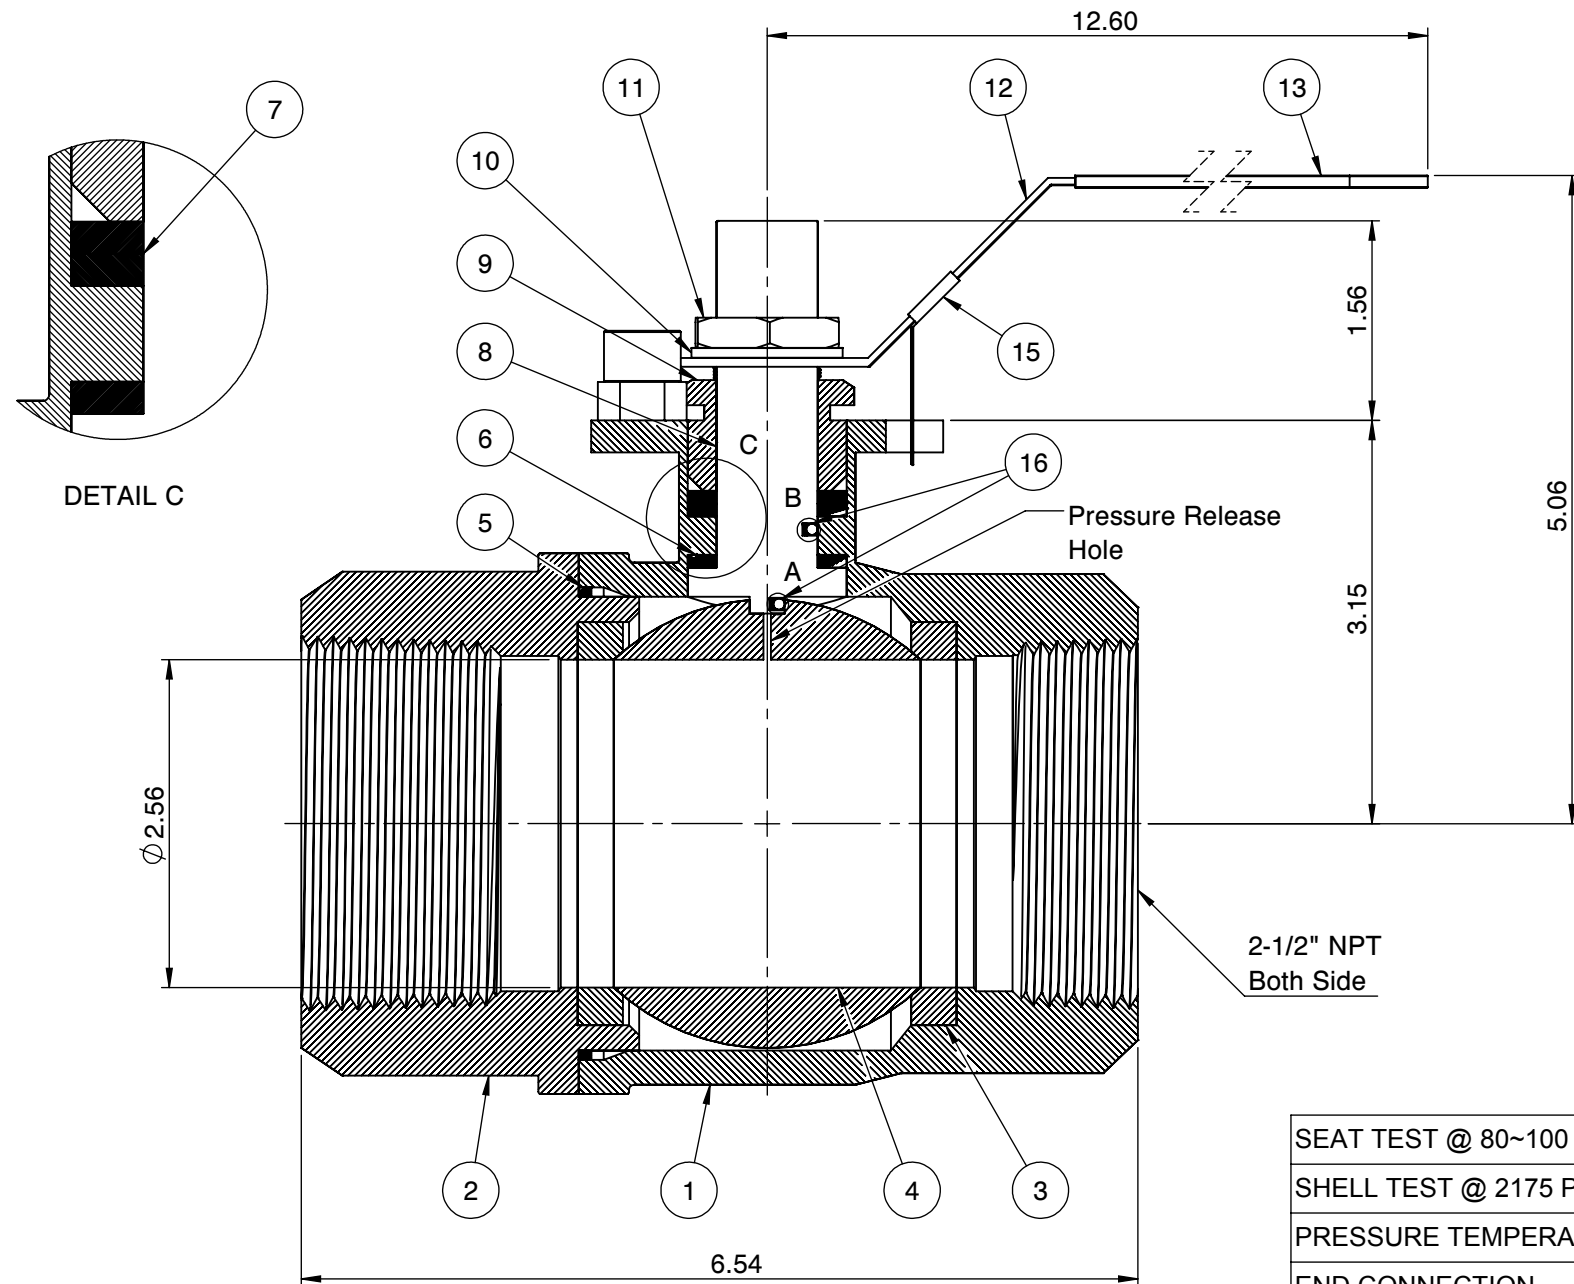

PRESSURE RATING 1500 WOG	
SEAT TEST @ 80~100 PSI	ASME B16.34
SHELL TEST @ 2175 PSI	ASME B16.34
PRESSURE TEMPERATURE RATING	ASME B16.34
END CONNECTION	ASME B16.11
JOINT STRENGTH	ASME B16.34
WALL THICKNESS	ASME B16.34
BASIC DESIGN	ASME B16.34

No.	Parts	Material
1	Body	ASTM A216 WCB
2	End Cap	ASTM A216 WCB
3	Seat	Super-Tek
4	Ball	ASTM A351 CF8
5	Gasket	Graphite
6	Thrust Washer	TFM
7	Stem Packing	GRAPHITE
8	Stem	A276-304 / 17-4PH
9	Gland	SS304
10	Handle Washer	SS304
11	Handle Nut	SS304
12	Handle	Zinc Plated Steel
13	Handle Cover	PVC
14	Stop Screw	Steel
15	Locking Device	Zinc Plated CS
16	Anti-Static Device	SS304

FOR CERTIFIED DRAWING CONSULT FACTORY	Drawn by : M	Date : June 21, 2019	Scale : Not To Scale	Rev : 0	Drawing Title: NPT 2-1/2" FULL PORT BALL VALVE	FLO-TITE™ 4815 W. 5th Street Tel : 910-738-8904 Lumberton, NC 28358 Fax : 910-738-9112 Website: www.flotite.com E-mail : flotite@flotite.com
	Checked by : M	Date : June 21, 2019	Unit : Inch	Sheet : xxx		
	Approved by : M	Date : June 21, 2019	Material : See Notes		Drawing No.: DT-T23CSFGGL065	

REVIEW ALL STANDARD SOFT PARTS FOR APPLICATION COMPATIBILITY