

DIRECT MOUNT FLANGED END




- Direct Connect Series
- ANSI Class 150
- Full Port/Bore
- Fire Safe API-607 7th Edition
- Size 2" - 8"
- Model DM-F150



DESIGN FEATURES:

- Floating Ball Design Protected
- Seat
- Spiral Wound Body Gasket with Secondary Metal Seal
- Open-Close Locking Handle, SS
- Actuator ISO-5211 Mounting Design
- Anti-Static Ground
- High Strength 17-4 PH

DIRECT MOUNT FLANGED END

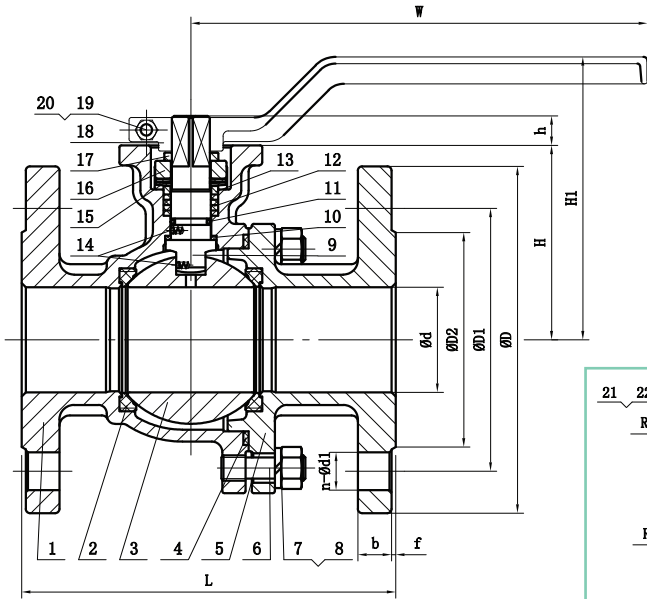

ITEM	PARTS	MATERIAL
1	BODY	CF8M
2	SEAT	RPTE
3	BALL	316
4	GASKET	316+GRAPHITE
5	BONNET	CF8M
6	BOLT	304
7	SPRING WASHER	304
8	NUT	304
9	STEM	17-4PH
10	STEM WASHER	PPL/PTFE
11	O RING	VITON
12	PACKING	GRAPHITE
13	GLAND	304
14	ANTI-STATIC DEVICE	316
15	DISC SPRING	304
16	GLAND FLANGE	CF8
17	STOPPER	304
18	HANDLE	SS
19	HEX SOCKET BOLT	304
20	NUT	304
21	BOLT	304
22	NUT	304

CL150

Unit:mm

Nominal Diameter	L	d	D2	D1	D	b	f	n-Ød1	H	h	H1	W	a	b	A	B	KXK
15 1/2"	108	15	35	60.3	90	9.6	2	4-16	55	9	87	140	3.0	3.5	36	50	9X9
20 3/4"	117	20	43	69.9	100	10	2	4-16	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	127	25	51	79.4	110	10.5	2	4-16	67	11	102	170	3.0	3.5	42	50	11X11
32 1 1/4"	140	32	63.5	88.9	115	11.2	2	4-16	76	11	111	170	3.0	3.5	42	50	11X11
40 1 1/2"	165	40	73	98.4	125	12.7	2	4-16	85	14	123	200	3.5	4.5	50	70	14X14
50 2"	178	50	92	120.7	150	14.3	2	4-19	93	14	131	200	3.5	4.5	50	70	14X14
65 2 1/2"	190	65	105	139.7	180	15.9	2	4-19	113	17	157	300	4.5	5.5	70	102	17X17
80 3"	203	80	127	152.4	190	17.5	2	4-19	126	17	170	300	4.5	5.5	70	102	17X17
100 4"	229	100	157	190.5	230	22.3	2	8-19	141	17	185	300	4.5	5.5	70	102	17X17

