




OTHER DIRECT MOUNT VALVES

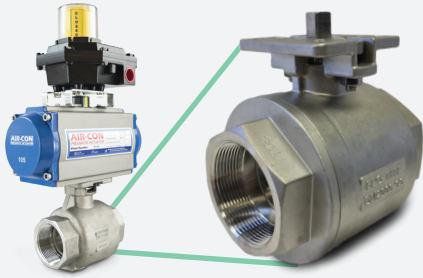

FLO-TITE Direct Connect (DC)

Valve Top Works offers a choice of one or two ISO 5211 FO bolt patterns.

Valve stems are marked to indicate flow direction.

Live loaded STEM V-ring.

Easy packing adjustment without actuator removal, standard open-end wrench easy to adjust, **PROBLEM FREE!**

Bolted adjustable packing design.

STEM leak detection windows prevent actuator damage in the event of valve stem leak.

VS

BOLT PATTERN

FLOW INDICATOR

V-RING

ACTUATOR ADJUSTMENT

PACKING DESIGN

LEAK DETECTION



Direct Mount (DM)

Most DM valves offer one bolt pattern.

Most DM valves don't offer.

V-ring packing only.

Most valve actuators need to be removed from valve to adjust stem packing, special tool needed. **VERY DIFFICULT!**

Threaded adjustable packing nut.

Most DM valves do not offer.



4815 WEST 5TH STREET • LUMBERTON NC, 28358

WWW.FLOTITE.COM • OFFICE: 910.738.8904 • FAX: 910.738.9112 • SALES@FLOTITE.COM