




Direct Mount Ball Valve

Three Way Brass Multi - Port Series MPT 355JN,365JN



ATTENTION
MAWP/WOG is a do not exceed pressure at normal ambient NPT & Weld End Models

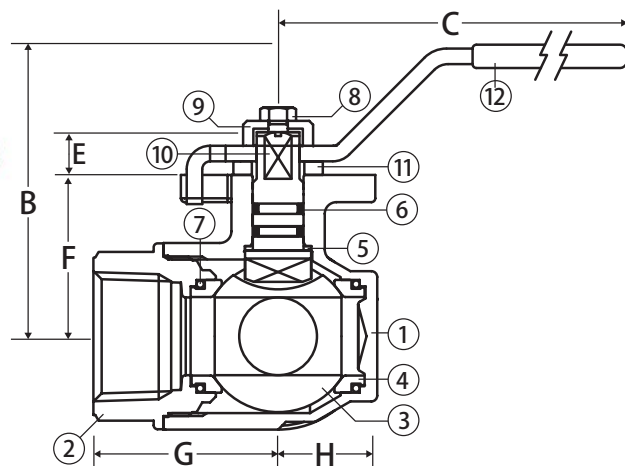

STANDARD PRODUCT NUMBERS

MPT355-BZ-T-TTT-L-025-JN T-Port Flow Pattern


MPT365-BZ-L-TTT-L-025-JN L-Port Flow Pattern

UNIQUE FEATURES

- ISO 5211 Direct Mounting Pad
- Square Valve Stem for Direct Mounting to Any ISO Actuator
- Four Seats Standard
- Blow-Out Proof Stem

Approvals

ANSI B1.20.1

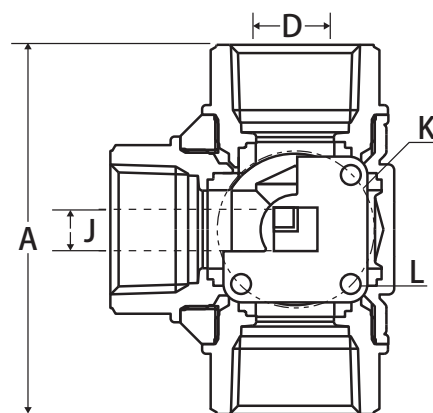


Material Specifications

No.	Part	Materials
1	Body	Brass - CW617N
2	End Connection (3)	Brass - CW617N
3	Ball	Chrome Plated Brass - CW617N
4	Seat (4)	PTFE
5	Stem Seal	PTFE
6	O-ring (2)	Viton®
7	Body O-ring (4)	Viton®
8	Screw*	Steel
9	Bushing*	Brass - CW614N
10	Stem	Brass - CW614N
11	Washer*	Nylon
12	Handle*	Steel

*Only included on lever operated valves

Valve Seat Rating

400 WOG - 100 WSP

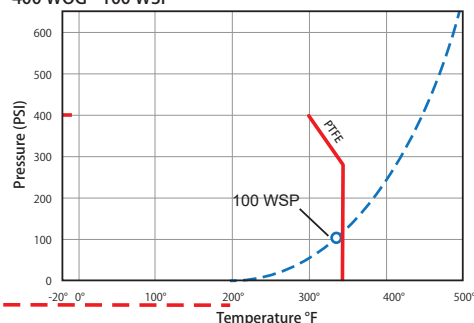

Flow Options

Lever Assembly	T-Port				L-Port		
Position 1							
Position 2							

Dimensions

Part No.	Size	A	B	C	D	E	F	G	H	J	K	L	Torque
MPT355JN-08	1/4"	2.64	2.44	4.72	0.39	0.35	1.20	1.32	0.77	0.35	F03	0.23	54
MPT355JN-10	3/8"	2.64	2.44	4.72	0.43	0.35	1.20	1.32	0.77	0.35	F03	0.23	54
MPT355JN-15	1/2"	2.87	2.44	4.72	0.43	0.35	1.20	1.44	0.77	0.35	F03	0.23	54
MPT355JN-20	3/4"	3.19	2.52	4.72	0.59	0.35	1.29	1.60	0.87	0.35	F03	0.23	54
MPT355JN-25	1"	3.74	2.95	6.69	0.79	0.43	1.63	1.87	1.00	0.43	F05	0.27	151
MPT355JN-32	1-1/4"	4.39	3.17	6.69	0.98	0.43	1.85	2.20	1.22	0.43	F05	0.27	151
MPT355JN-40	1-1/2"	4.86	3.66	6.69	1.26	0.43	2.34	2.43	1.79	0.43	F05	0.27	151
MPT355JN-50	2"	5.73	4.43	9.05	1.57	0.59	2.90	2.87	1.75	0.55	F07	0.35	275

Must specify ball: T = T-Port, L = L-Port

Due to continuous development & improvement of our product range, we reserve the right to alter the dimensions and technical data included in this brochure.

