

EASH LINK

Valve Automation Hardware



**One of the Largest
Selections Of Couplers and
brackets on the Market!**




Large selection of couplers will adapt to most actuator female square drives with ISO 5211 dimensions.



**Cast
bracket
for added
strength**



ISO Mounting Holes Standard

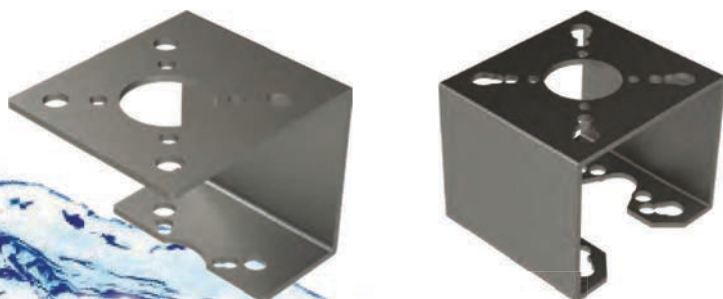

**Limit Switch
Bracket**


BK3H




www.flotite.com

BK0

Fabricated Type Bracket
CF8 / 304 SS or CS Plated

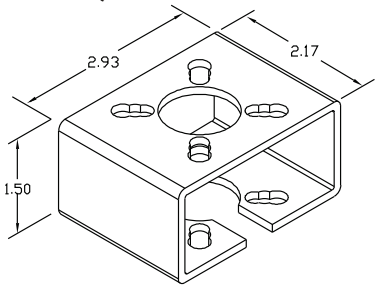

* 1/4" - 1"

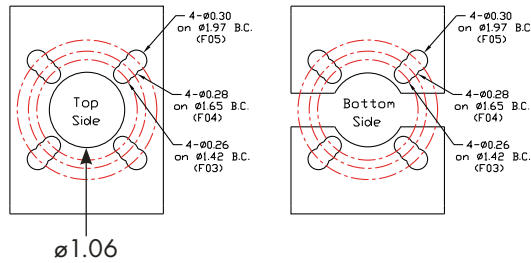

ISO Pattern
Actuator

F03

F04

F05

ISO Pattern
Valve


F03

F04


F05

BK1

Investment Cast Bracket
CF8 / 304 SS or WCB Plated



* 1/2" - 1 1/2"

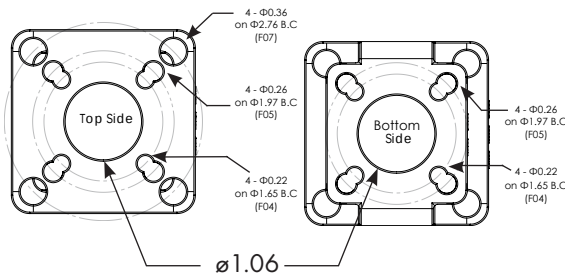

ISO Pattern
Actuator

F04

F05

F07

ISO Pattern
Valve


[F03] Optional

F04


F05

BK2

Investment Cast Bracket
CF8 / 304 SS or WCB Plated



* 1 1/2" - 2 1/2"

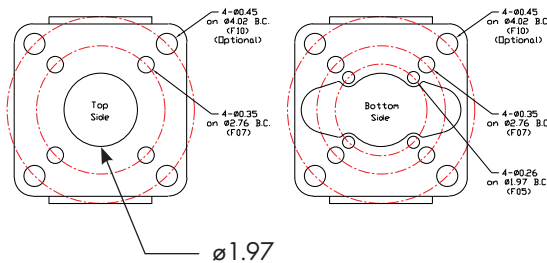

ISO Pattern
Actuator

F05

F07

F10

ISO Pattern
Valve



F07

F10

BK2.5

Fabricated Type Bracket
CF8 / 304 SS, CS Plated, or WCB Plated

* 2 1/2" - 6"

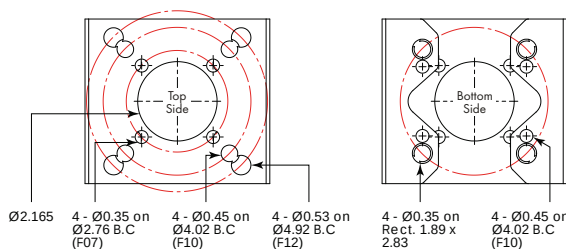

ISO Pattern
Actuator

F07



F10

F12

ISO Pattern
Valve

F10

RECT 1.89 x 2.83

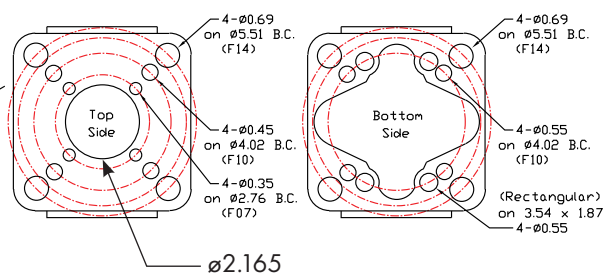BK3**Investment Cast**
304SS or WCB Plated***2½"–6"****ISO Pattern**
Actuator

F07

F10



F14

ISO Pattern
Valve

F10

[F14] Optional

RECT 3.54 x 1.87

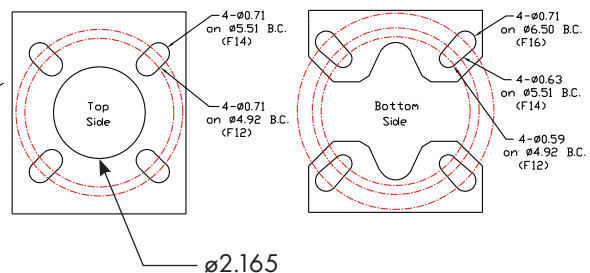BK3H**Fabricated Type**
CF8 / 304 SS or CS Plated***6"–10"****ISO Pattern**
Actuator

F07

F10

F12

F14



ISO Pattern
Valve

F10

F12

F14

RECT 3.54 x 1.87

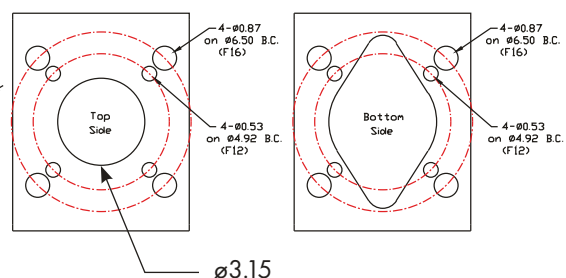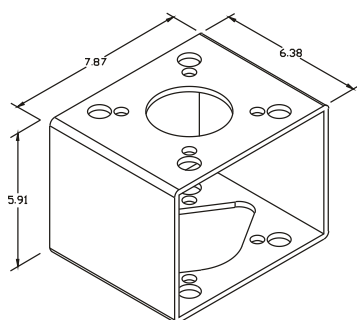BK4**Fabricated Type**
CF8 / 304 SS or CS Plated***6"–10"****ISO Pattern**
Actuator



F12

F16

ISO Pattern
Valve

F12

F16

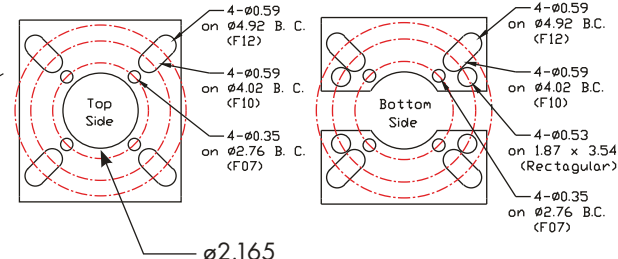BK5**Fabricated Type**
CF8 / 304 SS or CS Plated ***2½"–6"****ISO Pattern**
Actuator

F07

F10

F12

ISO Pattern
Valve

F07

F10

F12



F14

RECT 3.54 x 1.87

***Valve sizing reference for Flo-Tite models only. Refer to dimensions for other manufacturer's products.**

BK6

Fabricated Type
CF8 / 304 SS or CS Plated

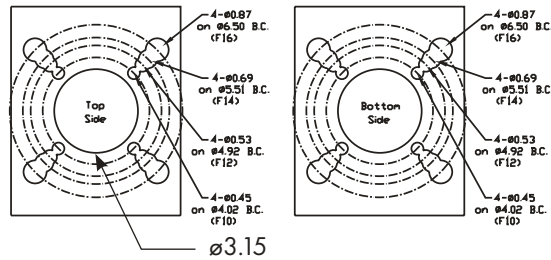

ISO Pattern
Actuator

ISO Pattern
Valve

F10

F10

F12

F12

F14

F14

F16



F16

*** Ideal for larger size butterfly valves**

BK7

Fabricated Type
CF8 / 304 SS or CS Plated

*** 6"-12"**

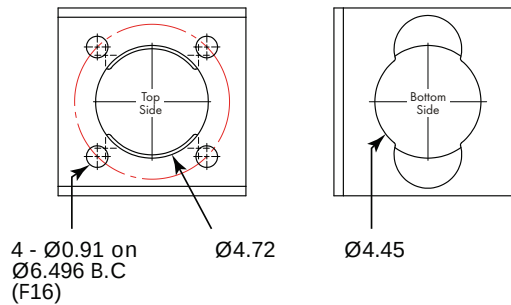

ISO Pattern
Actuator

ISO Pattern
Valve



F16

Consult Factory

BK10

Fabricated Type
CF8 / 304 SS or CS Plated

*** 8"-12"**

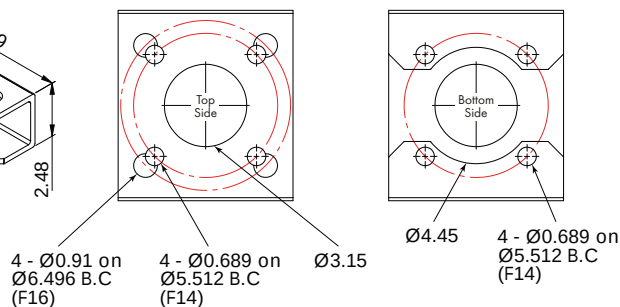

ISO Pattern
Actuator

ISO Pattern
Valve

F14




F14

F16

*** All brackets can be turned upside-down for additional mounting configurations.**



*** Valve sizing reference for Flo-Tite models only. Refer to dimensions for other manufacturer's products.**

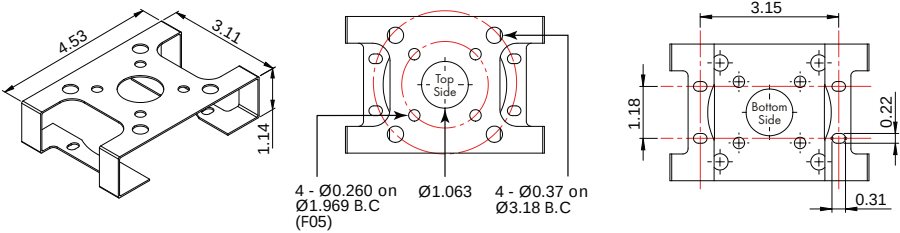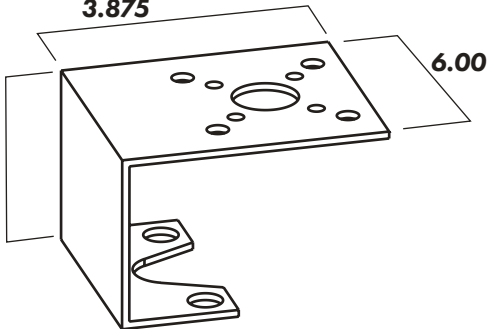
LS4 Fabricated Type CF8 / 304 SS or CS Plated 	ISO Pattern Actuator	ISO Pattern Valve
	F05 B.C. DIA 3.18	F04 F05 F07
LS5 Fabricated Type CF8 / 304 SS or CS Plated (Refer to Tech Bulletin 154E) 	ISO Pattern Actuator	ISO Pattern Valve
	F05 B.C. DIA 3.18	3.15 x 1.18
LS7M Fabricated Type CF8 / 304 SS or CS Plated 	ISO Pattern Actuator	ISO Pattern Valve
	F05 B.C. DIA 3.18	F10

* All brackets can be turned upside-down for additional mounting configurations.




* Valve sizing reference for Flo-Tite models only. Refer to dimensions for other manufacturer's products.

ISO Square Encapsulated Couplers

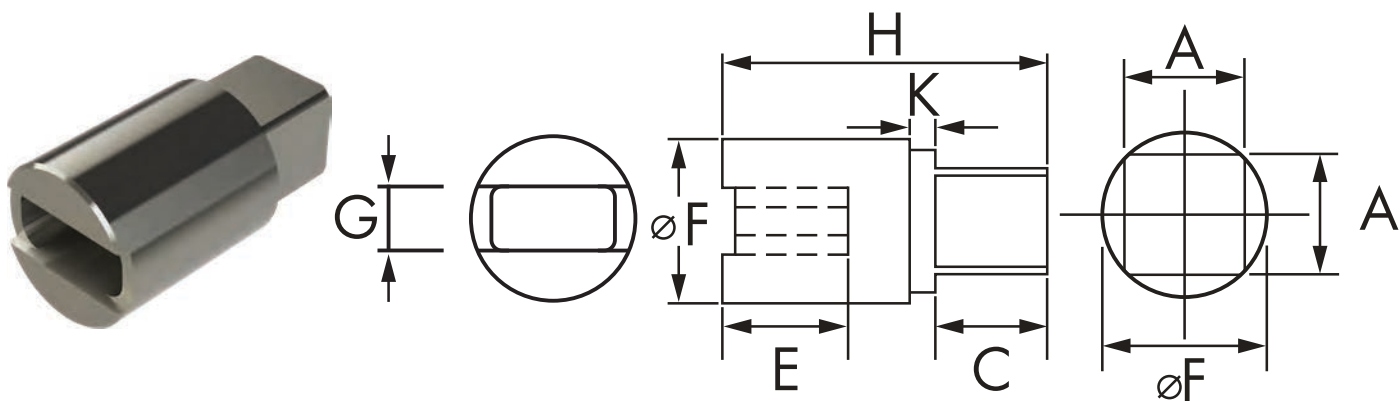

CPLR-050 (304 SS)									
Model	Square (A)	Slot (G)	Slot Depth (E)	Shoulder Height (H-C)	Weight	Length (H)	Sq. Height (C)	Diameter (F)	Lip (K)
050A	0.43	0.25	0.354	1.09	0.17	1.80	0.51	0.79	0.197
050B	0.43	0.315	0.47	1.00	0.18	1.70	0.51	0.87	0.197
CPLR-063 (304 SS)									
063A	0.55	0.25	0.354	1.07	0.20	1.82	0.55	0.79	0.197
063B	0.55	0.315	0.47	0.96	0.20	1.70	0.55	0.87	0.197
063C	0.55	0.375	0.512	1.24	0.29	1.99	0.55	0.98	0.197
CPLR-075 (304 SS)									
075A	0.667	0.25	0.354	1.28	0.29	2.02	0.75	0.87	-
075B	0.667	0.315	0.47	1.17	0.26	1.92	0.75	0.87	-
075C	0.667	0.375	0.512	1.24	0.35	2.19	0.75	0.98	0.197
075D	0.667	0.67	1.26	2.13	1.13	2.87	0.75	1.69	-
075DM	0.667	0.67	0.98	1.57	0.83	2.36	0.79	1.69	-
CPLR-0100 (304 SS)									
100C	0.866	0.375	0.512	1.44	0.53	2.33	0.90	1.10	-
100D	0.866	0.67	1.26	2.13	1.21	2.99	0.87	1.69	-
100DM	0.866	0.67	0.98	1.58	0.91	2.36	0.79	1.69	-
100DH	0.866	0.67	1.26	2.835	1.67	3.70	0.86	1.69	-
CPLR-125 (304 SS)									
125C	1.06	0.375	0.512	1.44	0.95	2.56	1.13	1.42	-
125D	1.06	0.67	1.26	2.13	1.37	3.23	1.10	1.69	-
125G	1.06	0.91	1.77	2.60	2.36	3.70	1.10	2.13	-
125DH	1.06	0.67	1.26	2.83	1.85	3.94	1.10	1.69	-
CPLR-200/210 (304 SS Plated)									
200D	1.41	0.67	1.26	2.13	2.19	3.62	1.50	1.89	-
210E	1.41	1.024	1.67	2.25	4.24	4.15	1.50	2.64	0.39
210G	1.41	0.91	1.77	2.60	2.73	4.09	1.50	2.13	-
CPLR-270 (304 SS/CS Plated)									
270EL	1.81	1.024	1.67	3.84	6.6	5.6	1.76	2.64	-
270ES	1.81	1.024	1.57	3.00	4.9	4.29	1.30	2.64	-
270F	1.81	1.375	1.89	4.055	8.27	5.94	1.89	3.07	0.39

ISO Square Slotted Couplers

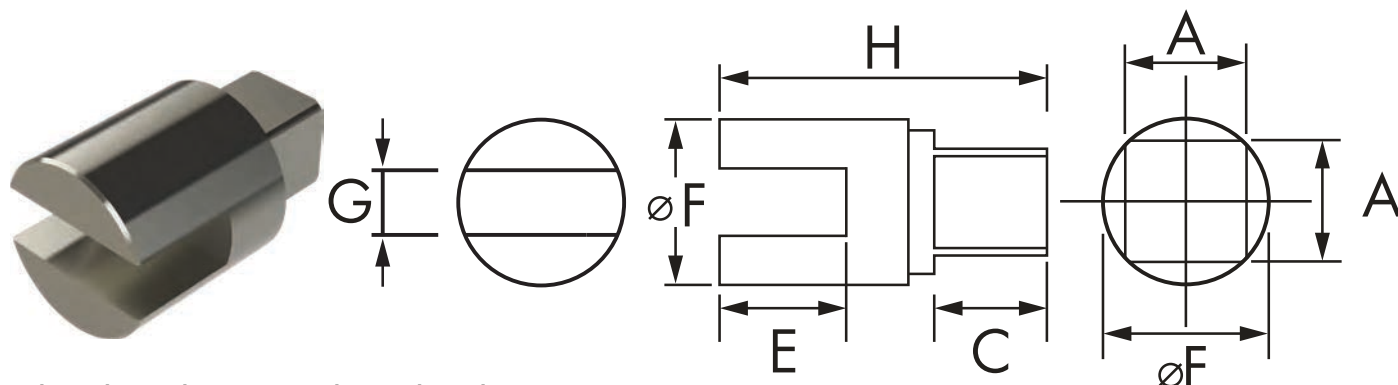

Slotted couplers are easily machined to meet custom requirements

CPLR-050 (304 SS)								
Model	Square (A)	Slot (G)	Slot Depth (E)	Shoulder Height (H-C)	Weight	Length (H)	Sq. Height (C)	Diameter (F)
050BT	0.43	0.315	0.52	1.13	0.23	1.68	0.55	1.00
050I	0.43	0.20	0.52	1.26	0.28	1.81	0.55	1.00
050II	0.43	0.24	0.52	1.26	0.27	1.81	0.55	1.00
CPLR-063 (304 SS)								
063BT	0.55	0.315	0.52	1.13	0.25	1.68	0.55	1.00
063I	0.55	0.20	0.52	1.26	0.30	1.81	0.55	1.00
063II	0.55	0.24	0.52	1.26	0.29	1.81	0.55	1.00




Keyless Lock System for Couplers

Key-Lock Couplers prevent coupler from shifting in operation which can cause mechanical malfunction.



ISO Star Drive Couplers

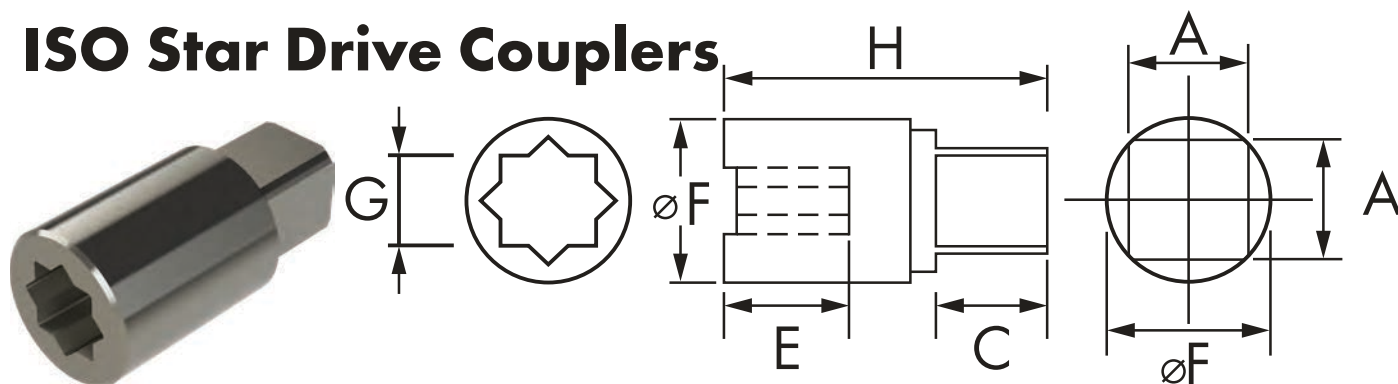


CPLR-063 (304 SS)								
Model	Square (A)	Slot (G)	Slot Depth (E)	Shoulder Height (H-C)	Weight	Length (H)	Sq. Height (C)	Diameter (F)
063MP-SQ	0.55	0.43 SQ	0.62	1.27	0.22	1.89	0.63	0.87
CPLR-100 (304 SS)								
100D-SQ	0.86	0.67 SQ	0.72	1.79	0.85	2.74	0.95	1.40
100MP-SQ	0.86	0.55 SQ	0.71	1.50	0.52	2.44	0.94	1.11

Square Insert Adapters


Model	Part ID	A	B	C	D	E	E1 *
SQ-1109	ST039	0.35	0.43	0.48	0.56	0.39	1.26
SQ-1411	ST016	0.43	0.55	0.56	0.71	0.63	1.26
SQ-1711	ST020	0.43	0.67	0.56	0.87	0.67	1.25
SQ-1714	ST021	0.55	0.67	0.72	0.87	0.67	1.25
SQ-2217	ST019	0.67	0.87	0.88	1.10	0.87	1.74
SQ-2722	ST017	0.87	1.06	1.12	1.42	1.06	1.74
SQ-3627	ST018	1.06	1.42	1.42	1.77	1.42	2.83

*E1 Type insert offers added height ideal for butterfly valves sizes 2"-6"

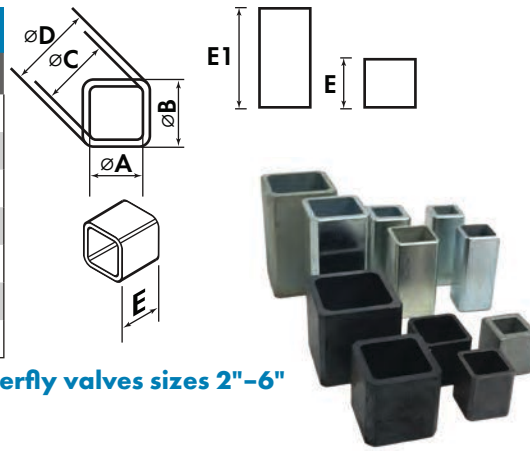

ISO Square Blank Couplers

Model	A	B	C	F	H
22B	0.67	0.87	0.51	0.87	2.01
28C	0.86	1.10	0.75	1.10	2.32
36D	1.06	1.41	0.87	1.42	3.39
80ES	2.00	2.37	1.50	3.15	4.65
80EL	2.00	2.37	1.77	3.15	6.10


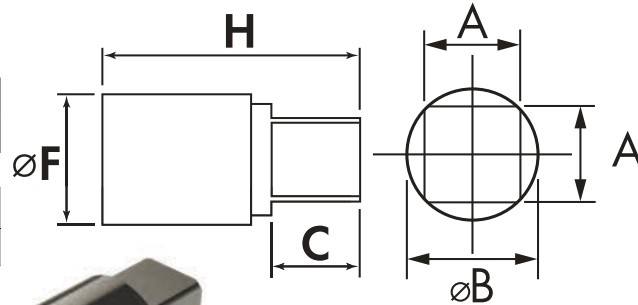


Custom Fabricated Stem Extensions

Butterfly ISO Spacer Plates (Plated Steel)

Model	A	B	C	D	E	F	G	H	J	FO Pattern
BF1	0.75	3.25*	0.47	2.76	0.39	1.97	0.29	1.49	3.86	F05/F07
S1A	0.50	3.25*	0.47	2.76	0.39	1.97	0.29	1.49	3.86	F05/F07
BF2	0.98	4.92	0.55	4.02	0.47	3.15	5.71			F10/12
BF3	0.50	4.92	0.55	4.02	0.47	3.15	6.00			F10/12

*Bolt circle in accordance with many Keystone/Bray valves

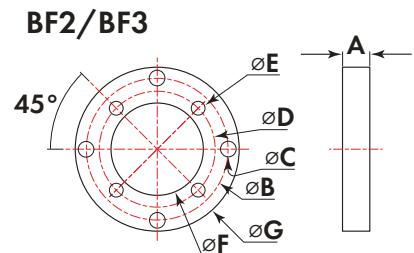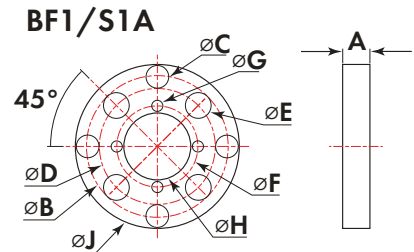

Easy-Link is a leading close tolerance custom manufacturer of mounting brackets and specialty products for use with valves, actuators, limit switches, positioners and many more items used in today's valve industry.

FLO-TITE™
valves & controls

4815 West 5th Street
Lumberton NC, 28358

www.flotite.com

Office: 910.738.8904
Fax: 910.738.9112
sales@flotite.com