



Fusion Series	2000 WOG	SS	Super-Tek Seat	T23-SS-F-F-G-L-020-XS3
NON FIRESAFE PER API 607-5			SIZE 3/4"	

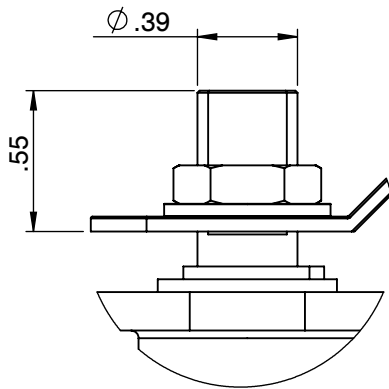


QR CODE

Actuator ISO Mounting Flange (F04)


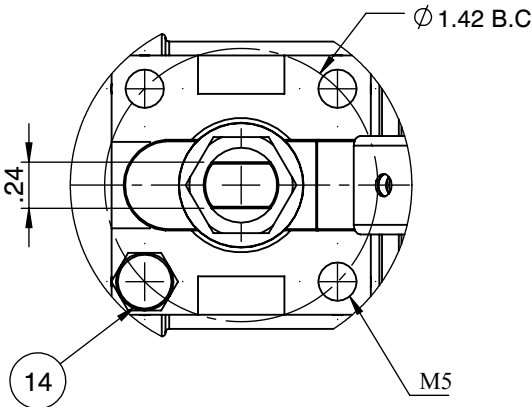


SS:	Flo-Tite T23SS CF8M	3/4" 2000 WOG
-----	---------------------------	---------------------

1/4" - 1" Body marking

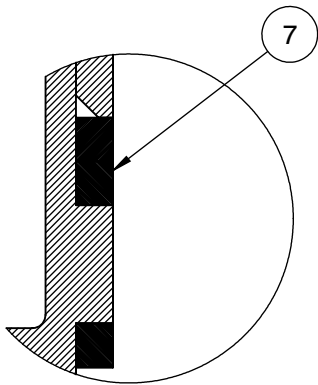

DETAIL C

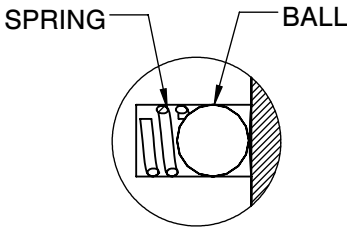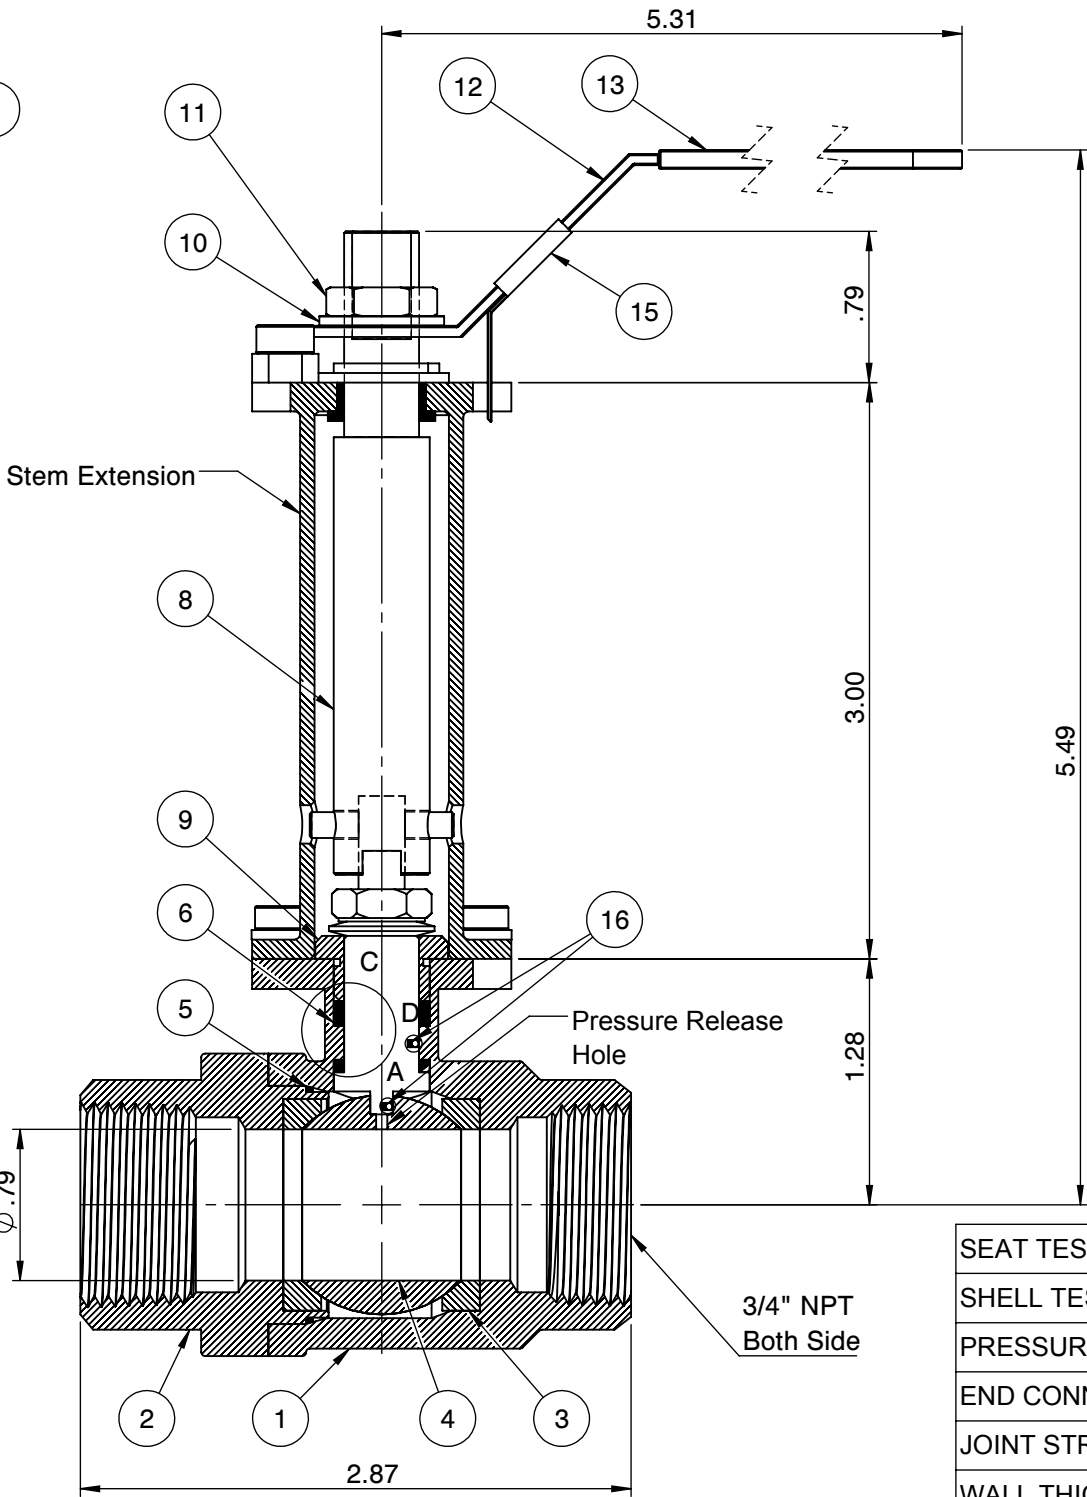

DETAIL : A
DETAIL : D

PRESSURE RATING 2000 WOG

SEAT TEST @ 80~100 PSI	ASME B16.34
SHELL TEST @ 2175 PSI	ASME B16.34
PRESSURE TEMPERATURE RATING	ASME B16.34
END CONNECTION	ASME B16.11
JOINT STRENGTH	ASME B16.34
WALL THICKNESS	ASME B16.34
BASIC DESIGN	ASME B16.34

No.	Parts	Material
1	Body	ASTM A351 CF8M
2	End Cap	ASTM A351 CF8M
3	Seat	Super-Tek (TFM 1600)
4	Ball	ASTM A351 CF8M
5	Gasket	Graphite
6	Thrust Washer	TFM
7	Stem Packing	TFM
8	Stem	A276-316 / 17-4PH
9	Gland	SS304
10	Handle Washer	SS304
11	Handle Nut	SS304
12	Handle	SS304
13	Handle Cover	PVC
14	Stop Screw	SS304
15	Locking Device	SS304
16	Anti-Static Device	SS316

FOR CERTIFIED DRAWING CONSULT FACTORY	Drawn by :	M	Date : June 14, 2019	Scale : Not To Scale	Rev : 0	Drawing Title: NPT 3/4" FULL PORT BALL VALVE	FLO-TITE™ 4815 W. 5th Street Tel : 910-738-8904 Lumberton, NC 28358 Fax : 910-738-9112 Website: www.flotite.com E-mail : flotite@flotite.com
	Checked by :	M	Date : June 14, 2019	Unit : Inch	Sheet : xxx		
	Approved by :	M	Date : June 14, 2019	Material :	See Notes		
						Drawing No.: DT-T23SSFFGL020XS3	

REVIEW ALL STANDARD SOFT PARTS FOR APPLICATION COMPATIBILITY