STAINLESS STEEL BALL VALVES

5 PIECE • FULL PORT • DOUBLE UNION END • THREADED CONNECTION • 3000 WOG

DU-3000-T-SS

- Solid ball construction
- 5 piece construction
- Mounting pad
- Reversible handle
- Latch lock handle available
- Adjustable stem packing with blow out proof stem
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content

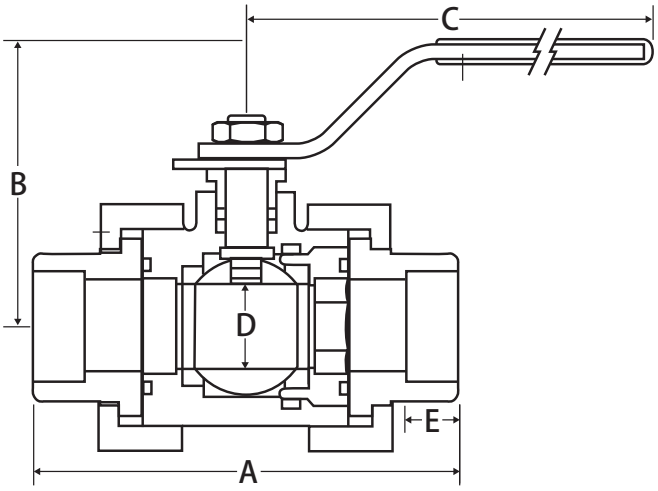

VALVE SEAT RATING

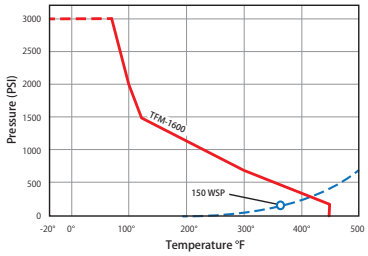

Part No.	Size	A	B	C	D	Torque
100-983	1/2"	3.58	2.40	4.17	0.62	65
100-984	3/4"	3.74	2.79	6.97	0.81	100
100-985	1"	4.29	2.96	6.97	1.00	120
100-986	1-1/4"	4.61	3.38	9.84	1.25	210
100-987	1-1/2"	5.24	3.67	9.84	1.50	300
100-988	2"	5.71	4.52	12.24	1.97	400

5 PIECE • FULL PORT • DOUBLE UNION END • SOCKET WELD • 3000 WOG

DU-3000-SW-SS

- Solid ball construction
- 5 piece construction
- Mounting pad
- Reversible handle
- Latch lock handle available
- Adjustable stem packing with blow out proof stem
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content

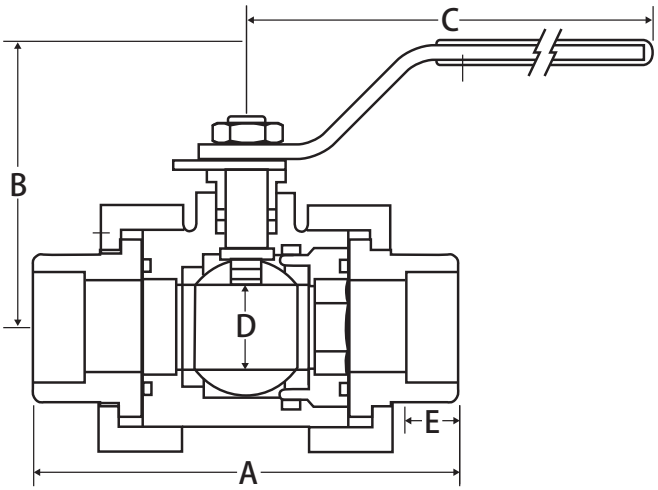

VALVE SEAT RATING

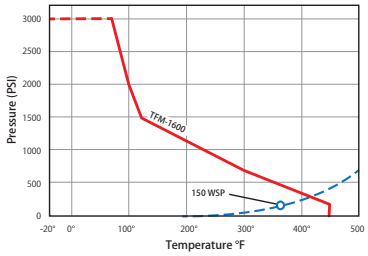

Part No.	Size	A	B	C	D	E	Torque
101-981	1/4"	3.58	2.40	4.17	0.44	0.41	35
101-982	3/8"	3.58	2.40	4.17	0.44	0.41	35
101-983	1/2"	3.58	2.40	4.17	0.62	0.44	65
101-984	3/4"	3.74	2.79	6.97	0.81	0.56	100
101-985	1"	4.29	2.96	6.97	1.00	0.72	120
101-986	1-1/4"	4.61	3.38	9.84	1.25	0.72	210
101-987	1-1/2"	5.24	3.67	9.84	1.50	0.72	300
101-988	2"	5.71	4.52	12.24	1.97	0.84	400

DOUBLE UNION CARBON STEEL BALL VALVES

5 PIECE • FULL PORT • DOUBLE UNION END • THREADED CONNECTION • 3000 WOG WITH STAINLESS STEEL BALL AND STEM

DU-3000-T-CS

- Solid ball construction
- 5 piece construction
- Mounting pad
- Reversible handle
- Latch lock handle available
- Adjustable stem packing with blow out proof stem
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content

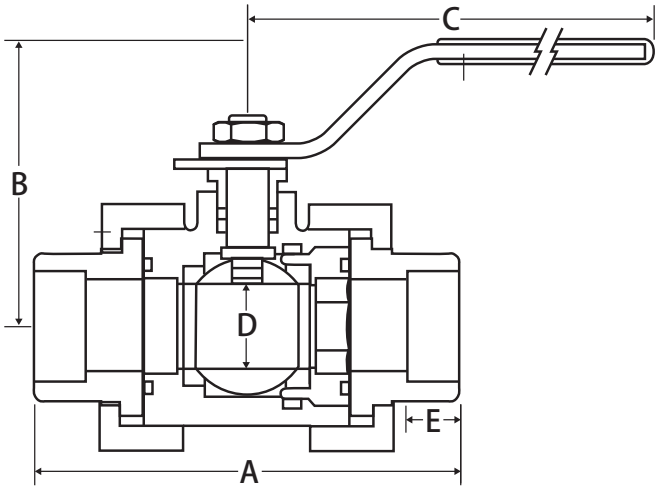

VALVE SEAT RATING

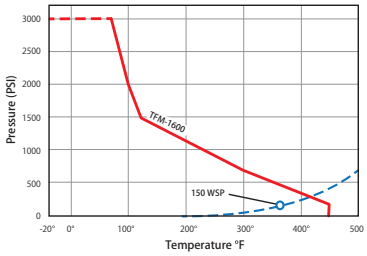

Part No.	Size	A	B	C	D	E	Torque
101-991	1/4"	3.58	2.40	4.17	0.44	0.41	35
101-992	3/8"	3.58	2.40	4.17	0.44	0.41	35
101-993	1/2"	3.58	2.40	4.17	0.62	0.44	65
101-994	3/4"	3.74	2.79	6.97	0.81	0.56	100
101-995	1"	4.29	2.96	6.97	1.00	0.72	120
101-996	1-1/4"	4.61	3.38	9.84	1.25	0.72	210
101-997	1-1/2"	5.24	3.67	9.84	1.50	0.72	300
101-998	2"	5.71	4.52	12.24	1.97	0.84	400

5 PIECE • FULL PORT • DOUBLE UNION END • SOCKET WELD • 3000 WOG WITH STAINLESS STEEL BALL AND STEM

DU-3000-SU-CS

- Solid ball construction
- 5 piece construction
- Mounting pad
- Reversible handle
- Latch lock handle available
- Adjustable stem packing with blow out proof stem
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content

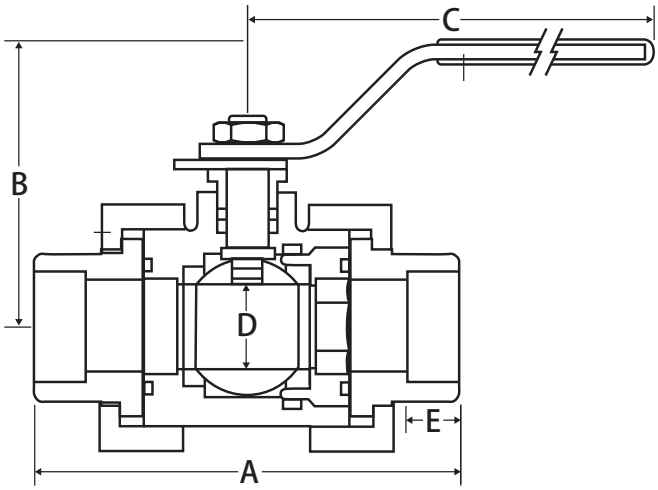

VALVE SEAT RATING

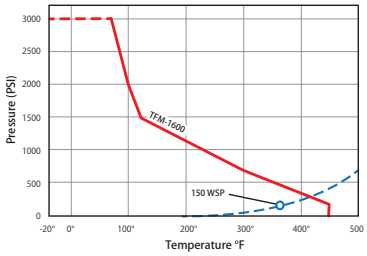

Part No.	Size	A	B	C	D	E	Torque
101-991	1/4"	3.58	2.40	4.17	0.44	0.41	35
101-992	3/8"	3.58	2.40	4.17	0.44	0.41	35
101-993	1/2"	3.58	2.40	4.17	0.62	0.44	65
101-994	3/4"	3.74	2.79	6.97	0.81	0.56	100
101-995	1"	4.29	2.96	6.97	1.00	0.72	120
101-996	1-1/4"	4.61	3.38	9.84	1.25	0.72	210
101-997	1-1/2"	5.24	3.67	9.84	1.50	0.72	300
101-998	2"	5.71	4.52	12.24	1.97	0.84	400